

## PAVP

### LED Globe & Guard Lighting for Harsh Environments

- UL 1598A Marine Outside Type
- UL 1598 Wet Locations
- UL 8750 LED Safety
- CSA C22.2 #250.0-08
- NEMA 3, 4 & 4X
- Tested to LM79 and LM80

#### Key Features:

- ① High lumen output in a compact luminaire
- ② Rugged 5/32" thick housing
- ③ Glare-reducing frosted globe
- ④ Field replaceable LED circuit boards and drivers
- ⑤ Protective guard




#### Additional Features:

- Ceiling, pendant and wall-mounting options
- No external fins
- Optional dimming driver
- Standard 2kV surge protection
- 5-year warranty

#### Standard Materials:

- Body: A360 aluminum (less than .4% copper content) with baked-on gray epoxy finish
- Guard: A360 aluminum (less than .4% copper content) with baked-on gray epoxy finish
- Gasket: One-piece silicone
- Lens: Borosilicate glass
- Hardware: Stainless steel



**PRO**lite LED Lighting™

A Division of Emergensee® Lighting, Inc.



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

## Catalog Number Logic

**PAVP 20L2 -U-HF-G-C-XX**

①

②

③

④

⑤

⑥

⑦

①

BASIC SERIES

(i) PAVP = Marine

(ii) PAVPD = Wet and Damp Locations

②

LAMP WATTAGE AND TYPE

20L2 = 20 Watt LED (4000 CCT)

③

BALLAST VOLTAGE

U = 120-277V 50/60 HZ

④

GLOBE

HF = Heat Resistant Frosted Glass Globe

HRG = Heat Resistant Green Glass Globe

HRA = Heat Resistant Amber Glass Globe

HRB = Heat Resistant Blue Glass Globe

HRR = Heat Resistant Red Glass Globe

⑤

GUARD

G = Guard

⑥

MOUNTING STYLE

P = Pendant

W = Wall Mount with Box

C = Ceiling


⑦

OPTIONS

30 = 3000K (CCT)

35 = 3500K (CCT)

50 = 5000K (CCT)



# PROlite LED Lighting™

A Division of Emergensee® Lighting, Inc.




Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

Mounting Style	Catalog Number		Shipping Weight (Lbs.)
	Marine UL 1598A, UL 1598	Wet Locations UL 1598	
Pendant Mount 	PAVP20-L2-U-HF-G-P	PAVPD20-L2-U-HF-G-P	4.1
Ceiling Mount 	PAVP20-L2-U-HF-G-C	PAVPD20-L2-U-HF-G-C	4.7
Wall Mount 	PAVP20-L2-U-HF-G-W	PAVPD20-L2-U-HF-G-W	5.4



**PROlite** LED Lighting™

A Division of Emergensee® Lighting, Inc.



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_


Part #: \_\_\_\_\_

Notes: \_\_\_\_\_




## Certification Guide

Model	Mount	Wattage	Operating Voltage	Total Lumens	Lumens per Watt	CRI	CCT	Ambient Temperature	Supply Wire Suitable Temperature, °C
PAVP20L2UHF	P, C, W	20W	120V - 277V 50/60 Hz	1769	87	83	4017	-20°C < Tamb < 50°C	90°C

## Photometric Data

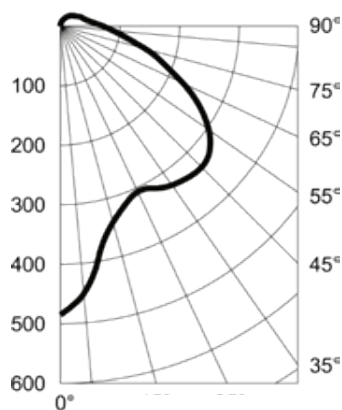


## Fixture Dimensions (inches)

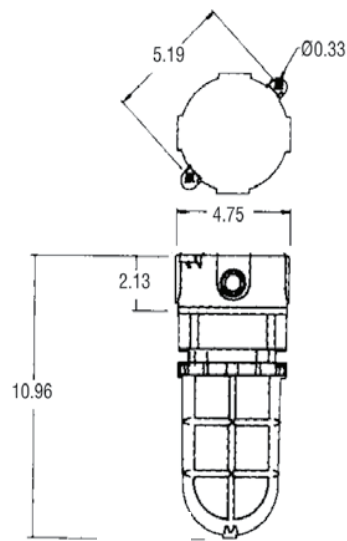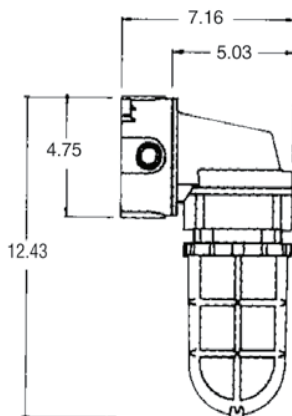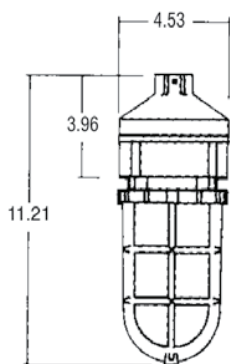


## Accessories

### Globe

	Type	Color	Thread Diameter	Catalog Number
	Heat Resistant Tempered Glass	Frosted	3-5/16in.	VGL100HRFRSTD

### Guard

	Description	Catalog Number
	Cast Aluminum Guard	59030AMPG