

# PETH-WRP LEDWraparound

The DuraGem™ LEDWraparound, 130lm/W, Damp Location, Dimmable + Smart Ready



## FEATURES

Lumen Output	2860 to 5200 lumens
Efficacy	130 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
CCT	4000K or 5000K
Size	4-FT
Warranty	7 Years

## APPLICATIONS

Premium indoor luminaire suitable for general indoors, lobbies, offices, meeting rooms, restrooms, hallways, stairwells, storage-closets, kitchens, and work-stations.

## CONSTRUCTION

Manufactured for durability using aluminum sheet housing with semi-gloss coating to resist corrosion, discoloration, and scratching. Suitable for Dry and Damp Locations.

## ELECTRICAL

Input voltage 120-277V models with 0-10V Continuous Dimming. Operating temperatures -4°F to 122°F (-20°C to 50°C).

## MOUNTING

Surface Mounting on ceilings or beams.

## OPTICS

Anti-UV Frosted Prismatic Polycarbonate Lens.

## EMERGENCY

Emergency Battery Backup Tunable, Select (10W, 15W, 20W) installed available.

## LISTINGS

DLC Premium listed. UL certified to meet US and Canadian standards. FCC, CE and RoHS compliant.

## WARRANTY

7 year exclusive limited warranty.



4-FT Models



## CORRELATED COLOR TEMPERATURES (CCT)

4000K

5000K





## SPECIFICATIONS

### ENERGY DATA

Input Voltage: 120-277V

Input Frequency: 50/60 Hz

Wattage: 22W, 40W

Power Factor: >0.9

Total Harmonic Distortion (THD): <10%

Operating Temperature: -4°F to 122°F (-20°C to 50°C)

### LIGHTING DATA

Lumens: 2860 (22W), 5200 (40W)

Lumens Per Watt: 130 lm/W

Color Correlated Temperature (CCT): 4000K, 5000K

Dimmable: 0-10V

Color Rendering Index (CRI): >82

L70: 75000 hours

## ORDERING INFORMATION

Model	Size	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions	Weight
PETH-WRP-4-22W-4K	4-FT	22W	120-277V	0.18A@120V, 0.08A@277V	2860	130 lm/W	4000K	0-10V	White	47.75"L x 7.12"W x 2.80"H	7.40 lbs
PETH-WRP-4-22W-5K	4-FT	22W	120-277V	0.18A@120V, 0.08A@277V	2860	130 lm/W	5000K	0-10V	White	47.75"L x 7.12"W x 2.80"H	7.40 lbs
PETH-WRP-4-40W-4K	4-FT	40W	120-277V	0.33A@120V, 0.14A@277V	5200	130 lm/W	4000K	0-10V	White	47.75"L x 7.12"W x 2.80"H	7.20 lbs
PETH-WRP-4-40W-5K	4-FT	40W	120-277V	0.33A@120V, 0.14A@277V	5200	130 lm/W	5000K	0-10V	White	47.75"L x 7.12"W x 2.80"H	7.20 lbs

### Emergency

**BLD-AM20D-480800** INSTALLED - Emergency Battery Backup Tunable, Select (10W, 15W, 20W)

(Blank) None

## ORDERING GUIDE

PETH	WRP	4	22W	4K	BLD-AM20D-480800
PETH	Group	Size	Wattage	CCT	Emergency

## PHYSICAL DIMENSIONS

### 4-FT Models

47.75"L x 7.12"W x 2.80"H



## SHIPPING INFORMATION

Model Wattage	Unit Weight	Inner Carton Dimensions	Inner Carton Weight	Quantity /Box	Master Carton Dimensions	Master Carton Weight	Quantity /Box
4-FT 22W	7.40 lbs	48.63"L x 7.50"W x 3.00"D	8.49 lbs	1	49.13"L x 13.00"W x 8.00"D	36.20 lbs	4
4-FT 40W	7.20 lbs	48.63"L x 7.50"W x 3.00"D	8.49 lbs	1	49.13"L x 13.00"W x 8.00"D	36.20 lbs	4




JOB NAME: \_\_\_\_\_

TYPE: \_\_\_\_\_

PART #: \_\_\_\_\_

NOTES: \_\_\_\_\_

## PETH-WRP-4-22W-XK

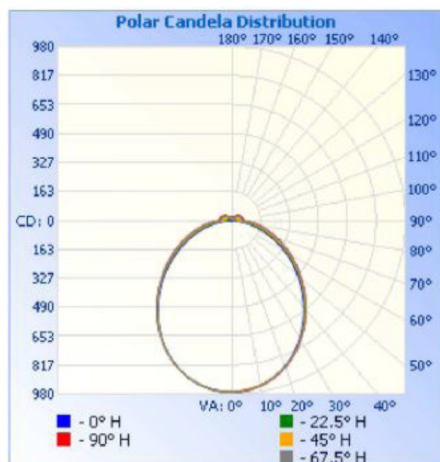

## PETH-WRP-4-25W-XK

