

PROlite LED Lighting™

A Division of Emergensee® Lighting, Inc.



Job Name: _____

Type: _____

Part #: _____

Notes: _____

PFD324

LED MUSHROOM CLOUDS



RoHS
compliant

SPECIFICATIONS:

- 120V INPUT VOLTAGE, 50/60Hz
- CONSTANT CURRENT
- AMBIENT OPERATING TEMPERATURE -40 °C (-40 °F) TO +50 °C (122 °F)
- ESTIMATED 50,000 HRS L
- WHITE POWDERCOATED ALUMINUM BASE AND ACRYLIC DIFFUSER
- CEILING MOUNT ONLY
- UL/CUL LISTED FOR DAMP LOCATION
- DIMMABLE
- STANDARD PACK QTY: 8 (11" MODEL) or 6 (14" MODEL)



PFD321

PFD324



MUSHROOM



PFD311

PFD314

DRUM

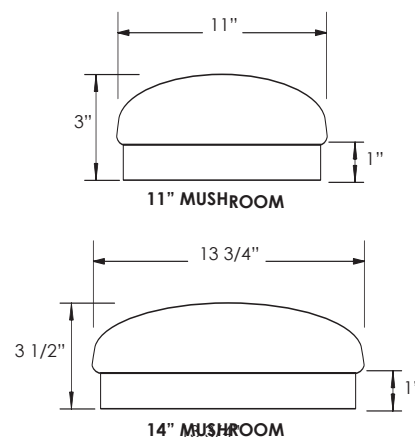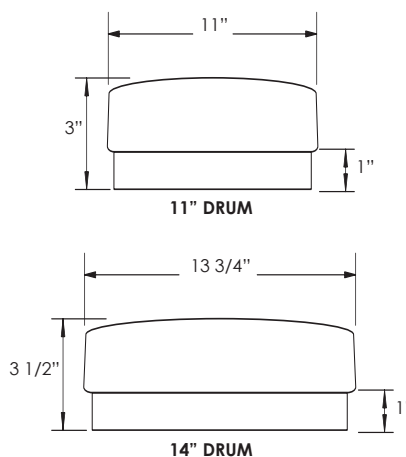

ORDERING INFORMATION:

MODEL		SOURCE WATTAGE	COLOR TEMP	BODY	LENS
PFD				W	W
	311 = 11"DRUM	LE800 = 12W POWER INPUT 800 LUMENS >65 LUMENS PER WATT*	C = 3000K W = 4000K	W = WHITE	W = WHITE
	321 = 11"MUSHROOM	LE1200 = 15W POWER INPUT 1200 LUMENS >80 LUMENS PER WATT*			
	314 = 14"DRUM	LE1800 = 22W POWER INPUT 1800 LUMENS >80 LUMENS PER WATT*			
	324 = 14"MUSHROOM				

LE800W LED REPLACEMENT PARTS

L08-AC120R-W = 3000K 1200 LUMEN ARRAY
L08-AC120R-C = 4000K 1200 LUMEN ARRAY

LE1200W LED REPLACEMENT PARTS

L12-AC120R-W = 3000K 1200 LUMEN ARRAY
L12-AC120R-C = 4000K 1200 LUMEN ARRAY

LE1800W LED REPLACEMENT PARTS

L18-AC120R-W = 3000K 1200 LUMEN ARRAY
= 4000K 1200 LUMEN ARRAY