



JOB NAME: _____

TYPE: _____

PART #: _____

NOTES: _____

PFE35 Series

RESIDENTIAL EUROSTYLE COMPOSITE OUTDOOR LIGHTING




RoHS
compliant



FEATURES:

- Available in LED, Incandescent & GU24
- Fade & Rust Resistant Composite Construction
- Wall or Ceiling Mount
- UL Listed for Wet Locations
- Standard Pack QTY: 12



PFE353



PFE352



PFE351

ORDERING GUIDE:

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
PFE351 PFE352 PFE353	INCANDESCENT, MEDIUM BASE, 120V I75-1 X 75W GU24 BASE, 120V G13-1 X 13W G18-1 X 18W G26-1 X 27W	W-White B- Black W-White B- Black	POLYCARBONATE F-Frosted POLYCARBONATE F-Frosted	LED LAMP, 3 YEAR WARRANTY, DIMMABLE, ENERGY STAR LWE-A19/E26, 80CRI, 3000K LCE-A19/E26, 80CRI, 4000K L-CFL, 2700K

EFE361

COMMERCIAL EUROSTYLE



RoHS
compliant




FEATURES:

- Available in LED & GU24
- Fade & Rust Resistant Composite Construction with Powder Coated
- Aluminum Base
- Wall or Ceiling Mount
- UL Listed for Wet Locations
- Standard Pack QTY: 12



DIMENSIONS:

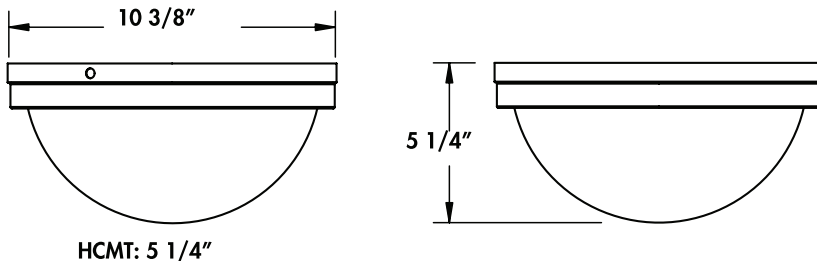

ORDERING INFORMATION:

MODEL	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
EFE361				P-Photocell
	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40° C TO +40° C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR LE800 - 13W, 80 CRI W-1140lm 3000K >>88 Lumens Per Watt** C-1280lm 4000K LE1200 - 14W, 80 CRI W-1430lm 3000K >102 Lumens Per Watt** C-1500lm 4000K LE1800 - 22W, 80 CRI W-1950lm 3000K >88 Lumens Per Watt** C-2130lm 4000K	W-White B- Black	POLYCARBONATE F-Frosted	

JOB NAME:

TYPE:

PART #:

NOTES:

EFE362
COMMERCIAL EUROSTYLE



RoHS
compliant




FEATURES:


- **Available in LED & GU24**
- **Fade & Rust Resistant Composite Construction with Powder Coated**
- **Aluminum Base**
- **Wall or Ceiling Mount**
- **UL Listed for Wet Locations**
- **Standard Pack QTY: 12**



DIMENSIONS:



HCMT: 5 1/4"

**ORDERING INFORMATION:**

MODEL	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
EFE362	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR LE800 – 13W, 80 CRI >88 Lumens Per Watt** W_1140lm 3000K C_1280lm 4000K LE1200 – 14W, 80 CRI >102 Lumens Per Watt** W_1430lm 3000K C_1500lm 4000K LE1800 – 22W, 80 CRI >88 Lumens Per Watt** W_1950lm 3000K C_2130lm 4000 MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY, ENERGY STAR L1800 – 22W Power Input W_1704lm 3000K CRI 74 (TYP) C_1824lm 4000K >82 Lumens Per Watt** GU24 BASE, 120V G13_1 X 13W G213_2 X 13W G18_1 X 18W G218_2 X 18W G26_1 X 27W	W_White B_Black W_White B_Black W_White B_Black W_White B_Black	POLYCARBONATE F_Frosted POLYCARBONATE F_Frosted POLYCARBONATE F_Frosted	P_Photocell N/A P_Photocell L_CFL, 2700K

EFE363

COMMERCIAL EUROSTYLE



RoHS
compliant





FEATURES:

- Available in LED & GU24
- Fade & Rust Resistant Composite Construction with Powder Coated
- Aluminum Base
- Wall or Ceiling Mount
- UL Listed for Wet Locations
- Standard Pack QTY: 12



DIMENSIONS:

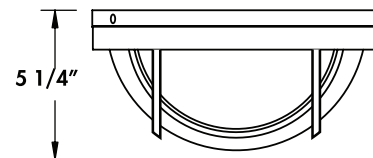

HCMT: 5 1/4"

ORDERING INFORMATION:

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
EFE363	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR LE800 - 13W, 80 CRI W-1140lm 3000K >>88 Lumens Per Watt** C-1280lm 4000K LE1200 - 14W, 80 CRI W-1430lm 3000K >102 Lumens Per Watt** C-1500lm 4000K LE1800 - 22W, 80 CRI W-1950lm 3000K >88 Lumens Per Watt** C-2130lm 4000K MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY, ENERGY STAR L1800 - 22W Power Input W-1704lm 3000K CRI 74 (TYP) C-1824lm 4000K >82 Lumens Per Watt** GU24 BASE, 120V G13-1 X 13W G213- 2 X 13W G18-1 X 18W G218- 2 X 18W G26-1 X 27W	W-White B- Black W-White B- Black W-White B-Black	POLYCARBONATE F-Frosted POLYCARBONATE F-Frosted POLYCARBONATE F-Frosted	P-Photocell N/A P-Photocell L-CFL, 2700K