

PROlite LED Lighting™

A Division of Emergence® Lighting, Inc.



TYPE: _____ DATE: _____
 JOB NAME: _____
 CONTRACTOR: _____
 CATALOG NO: _____
 NOTES: _____

PKH15Q

Wall AmberLED Small Bentley Kitty Hawk
 Area and Wall Light

L70
25°C

320,000 Hours



Shown with "KA" Kitty Hawk Arm and "BF" Baffle.

HOUSING

- Die Cast Aluminum Housing and Front Frame, Integral Heat Sinking and Driver Compartment. Photocell Adaptable. Nickel-Plated Stainless Steel Hardware. Includes Full Baffle Required to Maintain FWC Certification.

LISTINGS AND RATINGS

- CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP66 Sealed LED Compartment.

FINISH

- Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request

LENS

- Tempered Clear Flat Glass Lens

MOUNTING OPTIONS

- Mounts with Kitty Hawk Arm, 2 3/8" Diameter Mounting Arm Adapter, or Easy Hang Wall Bracket (Factory Installed).

AmberLED

- Aluminum Boards


WATTAGE

- 22w: Array: 22w, System: 25.4w; (Up to 100w HID Equivalent.)
- 37w: Array: 37w, System: 38.2w (Up to 175w HID Equivalent.)

DRIVER

- Electronic Driver, 120-277V, 50/60Hz or 347V, 50/60Hz
- Dimmable Driver

DIMENSIONS

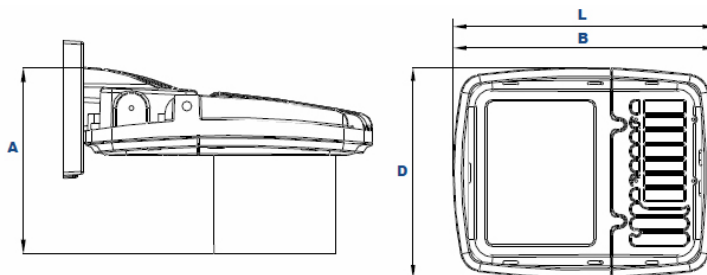

Dimensions

Width (D) 9 1/2" (240mm)

Length (B) 11 1/4" (299mm)

Height (A) 7 1/2" (193mm)

Length with Mount (L)

Kitty Hawk Arm (KA): 24 1/4" (617mm)

Mounting Arm Adapter (MA): 16" (404mm)

Easy-Hang Wall Bracket (KHEH): 12 1/4" (324mm)

WARRANTY

- 5-Year Warranty for -40°C to +50°C Environment.



Certification #2018-001




ORDERING INFORMATION: EXAMPLE= PKH15QF1X37UAMCZKASPB

MODEL	OPTICS	WATTAGE	VOLTAGE	CCT	LENS	COLOR	MOUNTING	OPTIONS	SHIELD
PKH15Q	F=TYPE V	1X22=22w 1X37=37w	U=120-277V C=347V	AM=Amber	C=Clear Flat Glass Lens	Z=Bronze C=Custom (Consult Factory)	KA=Kitty Hawk Arm MA= Mounting Arm Adapter EH=Easy-Hang Wall Bracket	SF=Single Fuse DF=Double Fuse SP=Surge Protection M1=Motion Sensor, IR for mounting heights of 20ft to 35ft M2=Motion Sensor, IR for mounting heights of 18ft or less R3=3-Pin Twist Lock Photocell Receptacle R7=7-Pin ANSI C136.41—2013 Twist Lock Photocell Receptacle with P18132 shorting cap	BF=Baffle

215-512-8100 • Fax 267-288-5604
 421 Bustleton Pike, Feasterville, PA 19053
 www.proliteled.com

Specifications subject to change without prior notice.
 © 2016, PROlite LED Lighting, Inc. ALL RIGHTS RESERVED



PROlite LED Lighting™

A Division of Emergence® Lighting, Inc.



TYPE: _____ DATE: _____

JOB NAME: _____

CONTRACTOR: _____

CATALOG NO: _____

NOTES: _____

MOUNTING OPTIONS



PKH15Q with Kitty Hawk Arm (KA)

Kitty Hawk Die-Cast Mounting Arm, Bronze Powdercoat Finish, Includes Hardware. Mounts Directly to Square Poles.



PKH15Q with Pole Mounting Arm Adaptor (MA)


Die-Cast Adaptor for 2 1/4" Horizontal Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.







PKH15Q with Easy-Hang Bracket (EH)


Die-Cast Easy-Hang Wall Bracket, Bronze Powdercoat Finish, Includes Hardware.

EPA (EFFECTIVE PROJECTED AREA)

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
	0.54	12 Lbs

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
	1.08	24 Lbs
	0.73	24 Lbs

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
	1.19	36 Lbs
	1.08	36 Lbs

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
	1.19	48 Lbs



Mounting Accessories (Order separately, Field installed)

KH20RPZ	Die-Cast Adaptor for 3" to 4" Round Poles, Bronze Powdercoat Finish. Use with Kitty Hawk Mounting Arm only.
KH20WMZ	Die-Cast Wall Mount Adaptor, Bronze Powdercoat Finish. Use with KH25A Kitty Hawk Mounting Arm only.
PTSB1SZ	Single Pole Tenon Spoke Bracket, 2 1/4" Horizontal Mounting Arm, Bronze Powdercoat Finish, Includes Hardware.
PTSB290SZ	Twin Pole Tenon Spoke Bracket, 2 1/4" Horizontal 90° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
PTSB2180SZ	Twin Pole Tenon Spoke Bracket, 2 1/4" Horizontal 180° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
PTSB390SZ*	Triple Pole Tenon Spoke Bracket, 2 1/4" Horizontal 90° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
PTSB3120SZ*	Triple Pole Tenon Spoke Bracket, 2 1/4" Horizontal 120° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
PTSB490SZ*	Quad Pole Tenon Spoke Bracket, 2 1/4" Horizontal 90° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.


*Special Order Item. Lead Time Three Weeks.

Accessories (Order separately, Field installed)

ACCHSG1Z	Die Cast Accessory Housing for Installing Sensors or Other Lighting Controls, Bronze Powdercoat Finish
----------	--

Replacement Parts (Order separately, Field installed)

KH15GL	Tempered Clear Flat Glass Lens.
KH25AZ	Kitty Hawk Die-Cast Mounting Arm, Bronze Powdercoat Finish, Includes Hardware. Mounts Directly to Square Poles.
ALMAAZ	Die-Cast Adaptor for 2 1/4" Horizontal Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
KHEHZ	Die-Cast Easy-Hang Wall Bracket, Bronze Powdercoat Finish, Includes Hardware.
PC1	120VAC Photocell
PC2	250-305VAC Photocell
P18110	110-130V 120VAC Pencil Photocell
P18112	208-277V 240VAC Pencil Photocell



PROlite LED Lighting™

A Division of Emergence® Lighting, Inc.



TYPE: _____ DATE: _____


JOB NAME: _____

CONTRACTOR: _____

CATALOG NO: _____

NOTES: _____

PHOTOMETRIC DATA

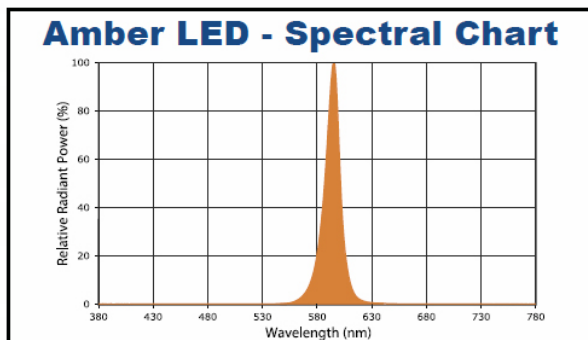

PHOTOMETRIC PERFORMANCE

LED Board Watts	Drive Current (mA)	Input Watts	Optics	Amber LEDs	
				Lumens	LPW
AmberLED 22w	525	25	Type V	1,159	46
AmberLED 37w	525	38	Type V	1,738	46

PROJECTED LUMEN MAINTENANCE

Data shown for Amber LEDs			Compare to MH			
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
L70 Lumen Maintenance @ 25°C / 77°F	25	1.00	0.98	0.97	0.93	429,000
L70 Lumen Maintenance @ 25°C / 77°F	38	1.00	0.98	0.95	0.91	320,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 50°C
L70 Lumen Maintenance @ 50°C / 122°F	25	1.00	0.97	0.94	0.88	259,000
L70 Lumen Maintenance @ 50°C / 122°F	38	1.00	0.95	0.89	0.79	141,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C
L80 Lumen Maintenance @ 40°C / 104°F	25	1.00	0.97	0.95	0.90	195,000
L80 Lumen Maintenance @ 40°C / 104°F	38	1.00	0.96	0.93	0.85	134,000

NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 525mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.