

Spec Grade
PROlite LED Lighting™

A Division of Emergensee® Lighting, Inc.



Job Name: _____

Type: _____

Part #: _____

Notes: _____

PKH25Q

EasyLED Small Bentley Kitty Hawk Area, Wall, and Flood Light



The LEPG PKH25Q luminaire is available in three wattages with a wide choice of mounting configurations and optical distributions designed to replace HID lighting systems from 150w to 400w MH or HPS. Typical applications include general area, parking, flood, security, and accent lighting for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 14 to 25 feet can be used based on light level and uniformity requirements.

Specifications and Features:

Housing:

Die Cast Aluminum Housing and Front Frame, Integral Heat Sinking and Driver Compartment. Photocell Adaptable. Nickel-Plated Stainless Steel Hardware.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP66 Sealed LED Compartment.

Finish:

Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:

Tempered Clear Flat or SoftLED Flat Glass Lens

Mounting Options:

Mounts with Kitty Hawk Arm, Adjustable Slipfitter, 2" Diameter Mounting Arm Adapter, Yoke, Two-Piece Bracket or Easy Hang Wall Bracket (Factory Installed).

EasyLED LED:

Aluminum Boards

Driver:

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz (81w Model Only); Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

Controls:

Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available. Please Consult Factory. Fixtures are Tested with LEPG Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Warranty:

5-Year Warranty for -40°C to +50°C Environment.




Shown with "KA" Kitty Hawk Arm Mounting Option.



Shown with "EH" Easy-Hang Wall Bracket



Shown with "SF" Slipfitter Option.



Dimensions


Width (D)	13 3/4" (340mm)
Length (B)	15" (381mm)
Height (A)	3 3/4" (92mm)

Length with Mount (L)

Kitty Hawk Arm (KA): 19 1/4" (491mm)
Slipfitter (SF): 18 3/4" (476mm)
Mounting Arm Adapter (MA): 19 3/8" (486mm)
Yoke (Y): 18" (457mm)
Bracket (BR): 18 3/4" (476mm)
Easy-Hang Wall Bracket (KHEH): 16" (406mm)

Order Information:

Model	Optics/Beam	Wattage	Driver	CCT	Lens	Color	Mounting	Options
PKH25Q								
PKH25Q =Small Bentley Kitty Hawk Area, Wall, and Flood Light	A =Type I/NEMA 7H x 5V B =Type II/NEMA 7H x 6V C =Type III/NEMA 7H x 7V D =Type IV/NEMA 6H x 5V F =Type V/NEMA 7H x 7V I =Narrow Beam/NEMA 4H x 4V* *Use with 81w & 112w 5K Model Only. See Page 4 & 6 for Distribution Information.	1X65 =65w* 1X81 =81w 1X112 =112w *Use with C & F Optics, 4K & 5K Models Only.	U =120-277V H =347-480V* *81w Model Only.	3K =3000K* 4K =4000K 5K =5000K * Use with 81w B, C, D, F Optics. * Use with 112w D & F Optics.	C =Standard Clear Flat Glass Lens S =SoftLED Flat Glass Lens	Z =Bronze C =Custom (Consult Factory)	KA =Kitty Hawk Arm SF =Slipfitter MA =Mounting Arm Adapter Y =Yoke BR =Two-Piece Swivel Bracket EH =Easy-Hang Wall Bracket NM =No Mount	SF =Single Fuse (120-277V Only) DF =Double Fuse (120-277V Only) SP =Surge Protection M1 =Motion Sensor, IR for mounting heights of 20ft to 35ft M2 =Motion Sensor, IR for mounting heights of 18ft or less R3 =3-Pin Twist Lock Photocell Receptacle R5 =5-Pin Twist Lock Photocell Receptacle R7 =7-Pin ANSI C136.41—2013 Twist Lock Photocell Receptacle S23 =Internal Microwave Sensor with dimming for mounting heights of 25' or less (120-277V Only)



Mounting Options:



PKH25Q with Kitty Hawk Arm (KA)

Kitty Hawk Die-Cast Mounting Arm, Bronze Powdercoat Finish, Includes Hardware. Mounts Directly to Square Poles.



PKH25Q with Pole Mounting Arm Adaptor (MA)

Die-Cast Adaptor for 2 1/2" Horizontal Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.



PKH25Q with Yoke (Y)

Stamped Heavy-Duty Steel Yoke, Bronze Powdercoat Finish, Includes Hardware.



PKH25Q with "SF" External Mount Slipfitter (SF)

External Mount Die-Cast Adjustable Slipfitter for 2 1/2" Tenons, Bronze Powdercoat Finish, Includes Hardware.



PKH25Q with Two-Piece Swivel Bracket (BR)

Two-Piece Stamped Steel Adjustable Bracket, Bronze Powdercoat Finish, Includes Hardware.






PKH25Q with Easy-Hang Bracket (EH)



Die-Cast Easy-Hang Wall Bracket, Bronze Powdercoat Finish, Includes Hardware.


EPA (Effective Projected Area)

Shown with Small Kitty Hawk Arm mounting.

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
	0.60	15 Lbs
1		

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
	1.20	30 Lbs
2@180° Mount		
	0.82	30 Lbs
2@90° Mount		

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
	1.32	45 Lbs
3@90° Mount		
	1.20	45 Lbs
3@120° Mount		

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
	1.32	60 Lbs
4@90° Mount		

Accessories & Replacement Parts:



KH20RPZ

KH20WMZ

PTBS1SZ



PTSB290SZ

PTBS2180SZ


PTBS390SZ*



PTSB3120SZ*

PTBS490SZ*

ACCHSG1Z



KH25GSZ

KH25WG

ACCHSG3



P17117

Mounting Accessories (Order Separately, Field Installed)

KH20RPZ	Die-Cast Adaptor for 3" to 4" Round Poles, Bronze Powdercoat Finish. Use with KH25A Kitty Hawk Mounting Arm only.
KH20WMZ	Die-Cast Wall Mount Adaptor, Bronze Powdercoat Finish. Use with KH25A Kitty Hawk Mounting Arm only.
PTBS1SZ	Single Pole Tenon Spoke Bracket, 2 1/2" Horizontal 90° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
PTSB290SZ	Twin Pole Tenon Spoke Bracket, 2 1/2" Horizontal 90° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
PTSB2180SZ	Twin Pole Tenon Spoke Bracket, 2 1/2" Horizontal 180° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
PTSB390SZ*	Triple Pole Tenon Spoke Bracket, 2 1/2" Horizontal 90° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
PTSB3120SZ*	Triple Pole Tenon Spoke Bracket, 2 1/2" Horizontal 120° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
PTSB490SZ*	Quad Pole Tenon Spoke Bracket, 2 1/2" Horizontal 90° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.


***Non-stock item. Consult factory for lead time.**

Accessories (Order Separately, Field Installed)

P18131	Twist Lock Non-Shorting (Open) Cap Disconnects Service to Fixture for Temporary or Permanent Disabling (Fixture Always Off). IP65, 480V Maximum.
P18132	Twist Lock Shorting Cap Provides Fixed Service to Fixture (Fixture Always On). IP65, Rated Load 7200w Tungsten.
P18140	110-120VAC Instant Twist Lock Photocell
P18150	120VAC Time Delay Twist Lock Photocell
P18152	277VAC Time Delay Twist Lock Photocell
P18156	120-277VAC Universal Twist Lock Photocell
P18157	480VAC Time Delay Twist Lock Photocell. For 480V use only.
ACCHSG1Z	Die Cast Accessory Housing for Installing Sensors or Other Lighting Controls, Bronze Powdercoat Finish
KH25GSZ	Aluminum Glare/House Side Shield, Bronze Powdercoat Finish, Includes Hardware.
KH25WG	Wire Guard, Stainless Steel Construction, Includes Hardware.
ACCHSG3	Bronze Polycarbonate Housing for Installing Sensors, Includes Sensor Bracket and Gasket.

Replacement Parts (Order Separately, Field Installed)

KH25GL	Tempered Clear Flat Glass Lens.
KH25GLSS	SoftLED Flat Glass Lens
KH25AZ	Kitty Hawk Die-Cast Mounting Arm, Bronze Powdercoat Finish, Includes Hardware. Mounts Directly to Square Poles.
ALMAAZ	Die-Cast Adaptor for 2 1/2" Horizontal Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
KH25YZ	Stamped Heavy-Duty Steel Yoke, Bronze Powdercoat Finish, Includes Hardware.
FL73SFXZ	External Mount Die-Cast Adjustable Slipfitter for 2 1/2" Tenons, Bronze Powdercoat Finish, Includes Hardware.
FL73BRZ	Two-Piece Stamped Steel Adjustable Bracket, Bronze Powdercoat Finish, Includes Hardware.
KHEHZ	Die-Cast Easy-Hang Wall Bracket, Bronze Powdercoat Finish, Includes Hardware.
P17117	Internal Microwave Sensor with Dimming, 120-277VAC, 50/60Hz. See P17117 Specification Page for Details.



Spec Grade
PROlite LED Lighting™

A Division of Emergensee® Lighting, Inc.




Job Name: _____

Type: _____

Part #: _____

Notes: _____


Photometric Data

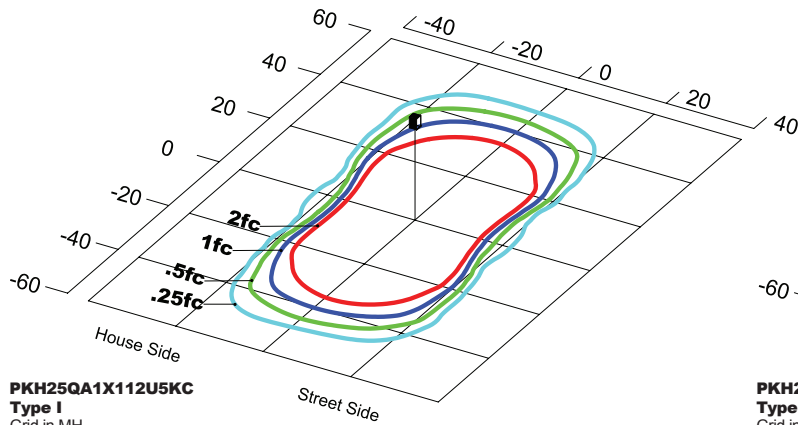

PKH25QA1X112U5KC

Type I


Grid in MH
MH=20 Feet

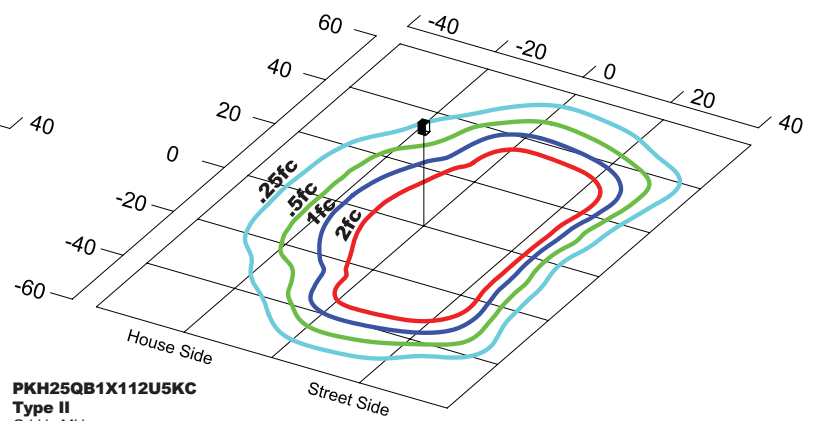

PKH25QB1X112U5KC

Type II


Grid in MH
MH=20 Feet

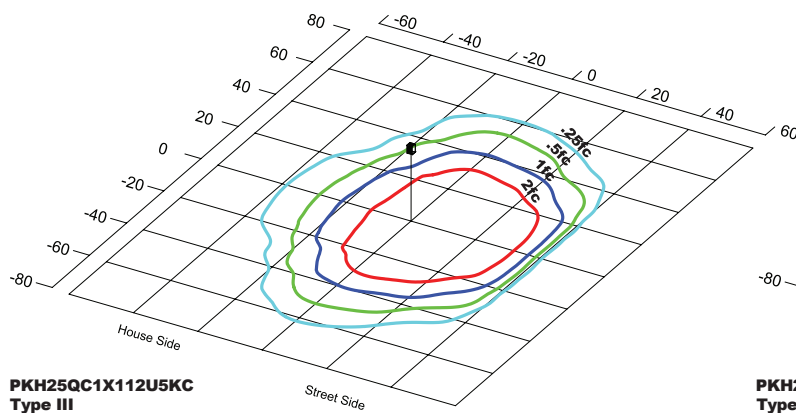

PKH25QC1X112U5KC

Type III


Grid in MH
MH=20 Feet

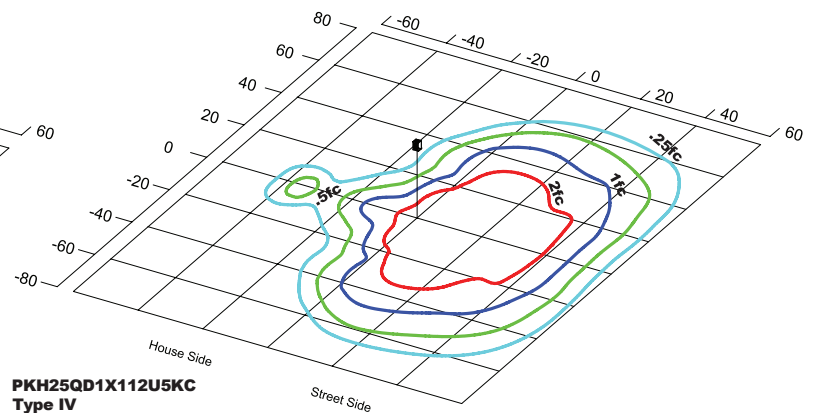

PKH25QD1X112U5KC

Type IV


Grid in MH
MH=20 Feet

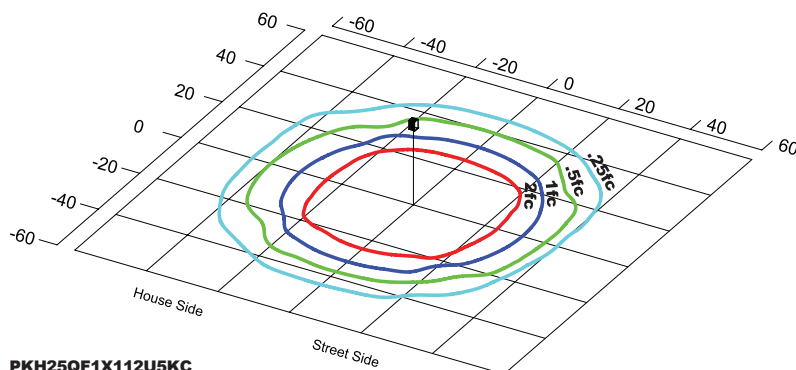

PKH25QF1X112U5KC

Type V

Grid in MH
MH=20 Feet



Spec Grade
PROlite LED Lighting™

A Division of Emergensee® Lighting, Inc.



Job Name:


Type:

Part #:

Notes:

Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	5000 CCT 80 CRI							4000 CCT 80 CRI					3000 CCT 80 CRI				
			Optics		Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
EasyLED 65w	525	68	C	Type III	7,089	105	2	0	2	6,823	101	2	0	2	-	-	-	-	-
			F	Type V	6,762	100	2	0	0	6,508	96	2	0	0	-	-	-	-	-
EasyLED 81w	525	84	A	Type I	10,503	125	3	0	2	10,109	120	3	0	1	-	-	-	-	-
			B	Type II	10,019	119	2	0	2	9,644	115	2	0	2	9,268	110	2	0	2
			C	Type III	11,007	131	2	0	2	10,594	126	2	0	2	10,181	121	2	0	2
			D	Type IV	10,338	123	1	0	2	9,950	118	1	0	2	9,563	114	1	0	2
			F	Type V	10,499	125	3	0	1	10,106	120	3	0	1	9,712	115	3	0	1
EasyLED 112w	525	121	A	Type I	15,214	126	3	0	2	14,644	121	3	0	2	-	-	-	-	-
			B	Type II	14,514	120	2	0	2	13,970	115	2	0	2	-	-	-	-	-
			C	Type III	15,944	132	3	0	3	15,346	127	3	0	3	-	-	-	-	-
			D	Type IV	14,039	116	2	0	3	13,513	112	2	0	3	12,986	107	2	0	3
			F	Type V	15,209	126	3	0	1	13,637	113	3	0	1	13,161	109	3	0	1



Spec Grade
PROlite LED Lighting™

A Division of Emergensee® Lighting, Inc.




Job Name:

Type:


Part #:

Notes:


Photometric Data

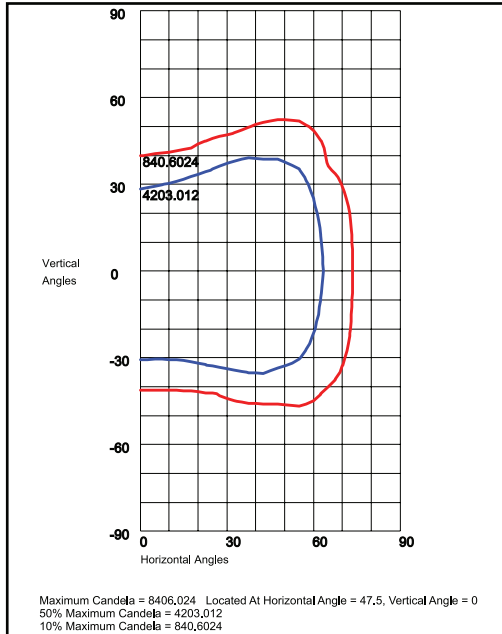


PKH25QA1X112U5KC
130°H x 70°V, NEMA 7H x 5V

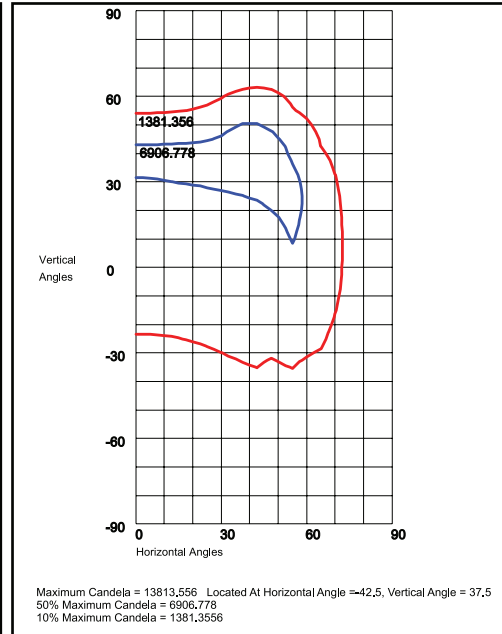


PKH25QB1X112U5KC
110°H x 30°V, NEMA 7H x 6V

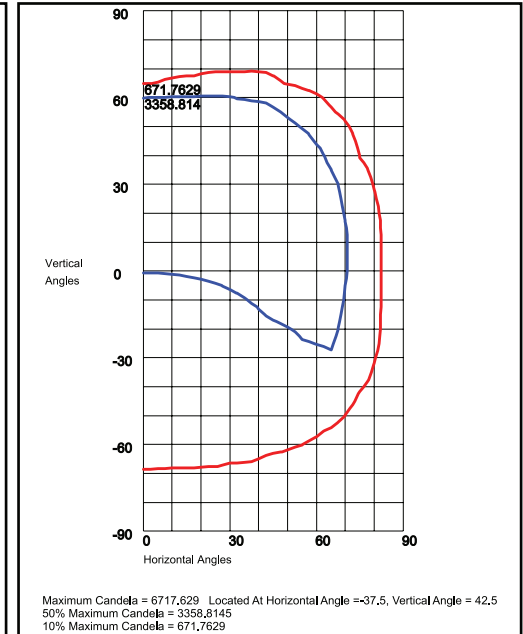


PKH25QC1X112U5KC
120°H x 70°V, NEMA 7H x 7V

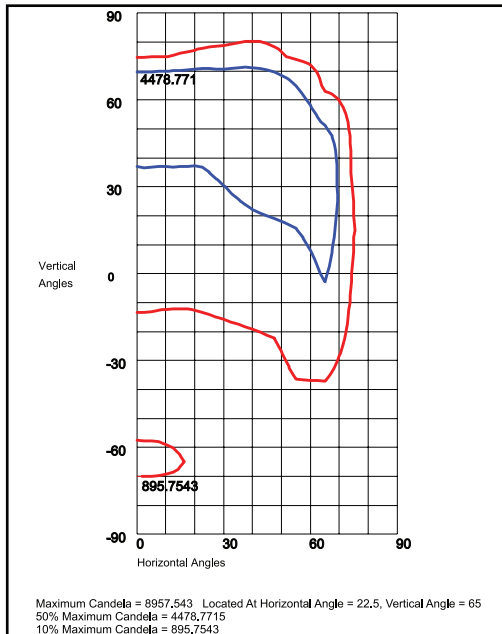


PKH25QD1X112U5KC
110°H x 30°V, NEMA 6H x 5V

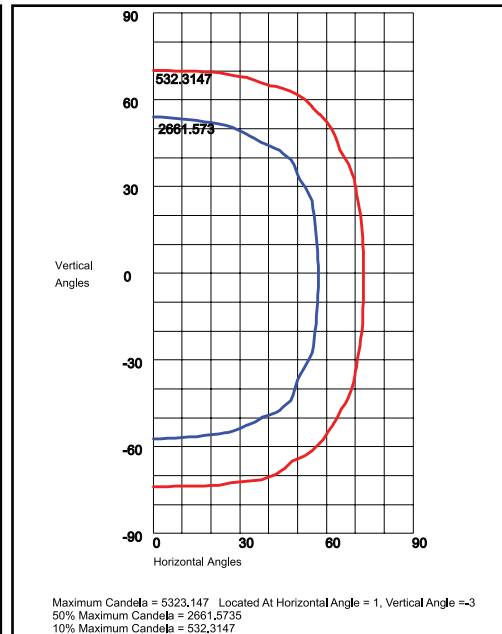

PKH25QF1X112U5KC
115°H x 110°V, NEMA 7H x 7V

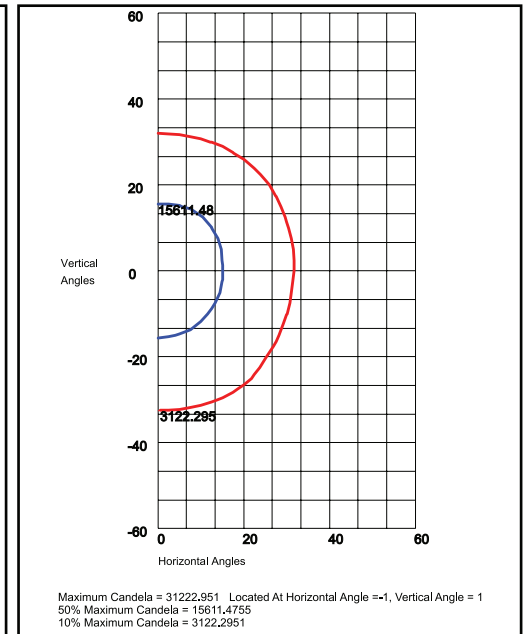

PKH25QI1X112U5KC
30°H x 30°V, NEMA 4H x 4V



Spec Grade
PROlite LED Lighting™

A Division of Emergensee® Lighting, Inc.



Job Name: _____

Type: _____

Part #: _____

Notes: _____

Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts		Optics	5000 CCT 80 CRI		4000 CCT 80 CRI		3000 CCT 80 CRI	
					Lumens	LPW	Lumens	LPW	Lumens	LPW
EasyLED 65w	525	68	C	120°H x 70°V, NEMA 7H x 7V	7,038	104	6,774	100	-	-
			F	115°H x 110°V, NEMA 7H x 7V	6,779	100	6,525	97	-	-
EasyLED 81w	525	84	A	130°H x 70°V, NEMA 7H x 5V	10,496	125	10,102	120	-	-
			B	110°H x 30°V, NEMA 7H x 6V	10,033	119	9,657	115	9,280	110
			C	120°H x 70°V, NEMA 7H x 7V	10,928	130	10,518	125	10,108	120
			D	100°H x 30°V, NEMA 6H x 5V	10,271	122	9,886	117	9,501	113
			F	115°H x 110°V, NEMA 7H x 7V	10,526	125	10,131	120	9,737	116
			I	30°H x 30°V, NEMA 4H x 4V	10,181	121	-	-	-	-
EasyLED 112w	525	121	A	130°H x 70°V, NEMA 7H x 5V	15,204	126	14,634	121	-	-
			B	110°H x 30°V, NEMA 7H x 6V	14,533	120	13,988	116	-	-
			C	120°H x 70°V, NEMA 7H x 7V	15,830	131	15,236	126	-	-
			D	110°H x 30°V, NEMA 6H x 5V	13,794	114	13,277	110	12,760	105
			F	115°H x 110°V, NEMA 7H x 7V	15,248	126	13,672	113	13,195	109
			I	30°H x 30°V, NEMA 4H x 4V	14,078	116	-	-	-	-

Projected Lumen Maintenance

Data shown for 5000 CCT			Compare to MH			
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
L70 Lumen Maintenance @ 25°C / 77°F	121	1.00	0.98	0.95	0.91	320,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 50°C
L70 Lumen Maintenance @ 50°C / 122°F	121	1.00	0.95	0.89	0.79	141,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C
L80 Lumen Maintenance @ 40°C / 104°F	121	1.00	0.96	0.93	0.85	134,000

NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 525mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.